




Li-98 Thermal Tape

Feature 特性

- Good adhesion 良好的粘著性 (Acrylic PSA)
- Good thermal conductivity 良好的導熱性
- Soft and compressibility 柔軟及可壓縮
- Easy to assemble 容易施工

Application 產品應用端


- Electronic components: IC、CPU、MOS、LED、M/B、P/S、Heat Sink.
- LCD-TV、Notebook PC、PC、Telecom Device、Wireless Hub..... etc.
- DDR II Module、DVD Applications、Hand-set applications.....etc.

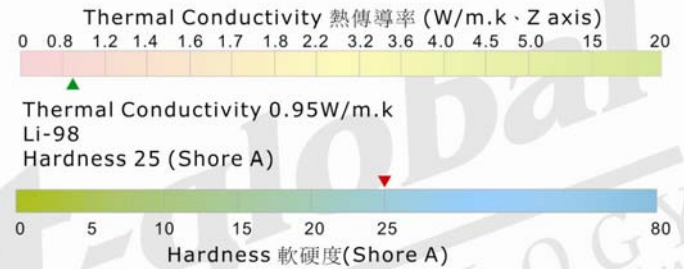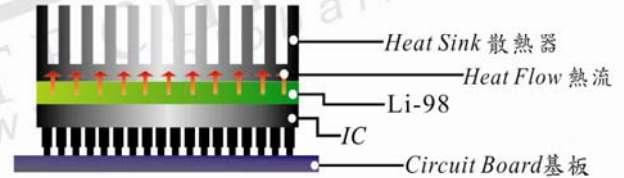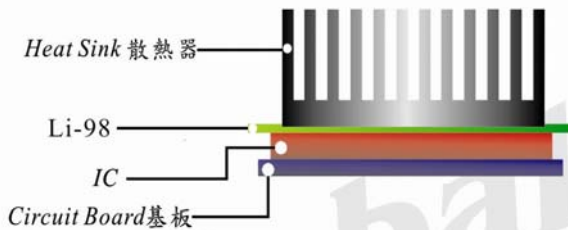

Property	Li-98		Unit	Test
With fiberglass net 基材	With fiberglass net 有基材		-	-
Color 顏色	White 白色		-	Visual
Thickness 厚度	0.15	0.25	mm 公厘	ASTM D374
	0.0059	0.0098	inch 公吋	ASTM D374
Thermal Conductivity 導熱係數	0.95		W/m.k	ASTM D5470
Initial Tack 初期黏度	11	10	cm	PSTC-6
Insulation Strength 耐電壓值	>3	>4	kv	ASTM D149
Weight Loss 重量損失	<1		%	ASTM E595
Die shear strength 黏著力	69		N/cm ²	-
Working Temperature 工作溫度	-30 ~ +120		°C	-
Surface Resistance 表面阻抗	2.2x10 ¹¹		ohm	-
Holding power 1000g at room temperature using 1 in ² 保持力	>10000		min-cm	PSTC-7
Volume resistance 體積阻抗	5x10 ¹¹		ohm	ASTM D 257
Specific Gravity 比重	1.85		g/cm ³	-
Hardness 硬度	25		Shore A	ASTM D 2240
REACH Compliant 符合REACH 規範	Yes 是		RoHS Compliant 符合RoHS 規範	Yes 是

● Pre-cut for different shape 可依需求沖型裁切

● Need sample? 樣品需求



- Choose the P/N.
- Fill the size: x, y, z.
- Fill the quantity you need.