

S720AB Thermal Conductive Gel


Feature特性

- Good thermal conductivity 良好的導熱性
- Room temperature 室溫熟化 (35hrs at 25°C / 35小時在25°C)
- A:B=100:5
- High stability asy to assemble 高穩定性
- Water proof 防水氣/電子灌注封裝

Application產品應用端

- Electronic components: IC、CPU、MOS LED、M/B、P/S、Heat Sink.
- LCD-TV、Notebook PC、PC、Telecom Device、Wireless Hub..... etc.
- DDR II Module、DVD Applications、Hand-set applications.....etc.

1. Mix混合

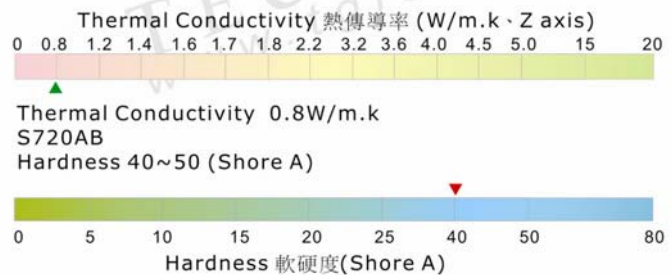


Storage

S720AB has a shelf-life of twelve (12) months from the date of manufacture, as indicated by the lot number, when stored in the original, unopened contained at, or below 25 °C.


保存方式

S720AB 在未開封狀態，在室溫25°C以下可保存12個月

2. Vacuum out air 抽真空

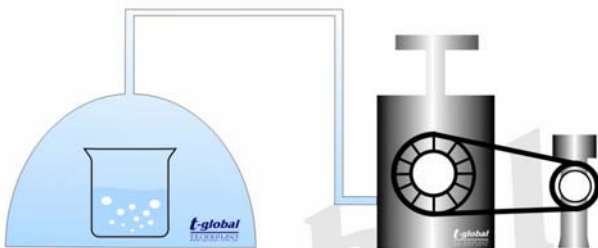

3. Pour S720AB

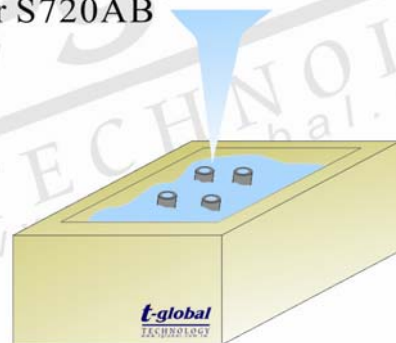

Property	S720AB	Unit	Tolerance	Test
Color 顏色	White 白色	-	-	Visual
Thermal Conductivity 導熱係數	0.8	W/m.k	-	ASTM E1530
Insulation Strength 耐電壓值	>6	kv/mm	-	ASTM D149
Weight Loss 重量損失	<1	%	-	ASTM E595
Specific Gravity 比重	1.97	g/cm ³	±0.2	ASTM D792
Working Temperature 工作溫度	-40~180	°C	-	-
Standard Shape 標準包裝	-	1kg /pot	-	-
Viscosity 混合後黏度	2000~3000	Cps	-	ASTM D412
Hardness 硬度	40~50	Shore A	±5	ASTM D2240
REACH Compliant 符合REACH 規範	Yes 是	RoHS Compliant 符合RoHS 規範		Yes 是

- Need sample? 樣品需求

S720AB - 20gram

- Choose the P/N.
- Fill the amount you need.

t-global 高柏科技有限公司 T-GLOBAL TECHNOLOGY CO., LTD

TECHNOLOGY
www.tglobal.com.tw

www.tglobal.com.tw service@tglobal.com.tw

Service Center: 0800211298 TEL: +886-2-26702575 FAX: +886-2-86776762

Copyright 2010 by T-Global Technology Co., Ltd