


TG4040LC 超軟導熱矽膠 Ultra Soft Thermal Pad

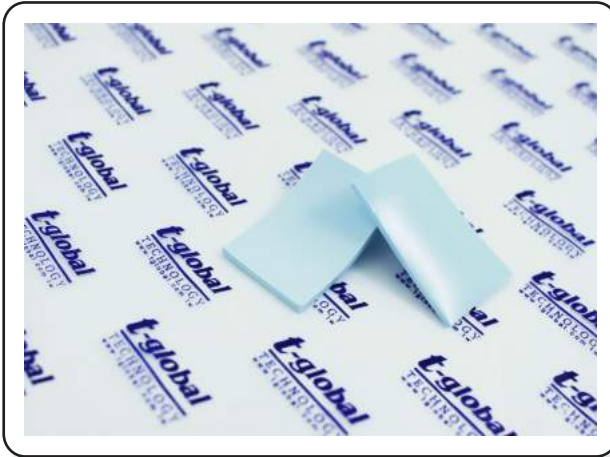


產品特性 Features

Excellent thermal conductivity 良好的導熱性
Great elasticity and elongation 良好回彈性及延展性
Natural tack on one side; attached film on the other side
單面自黏另一面不黏;另一面為光滑面
Great reworkability 方便重工作業
Electrical insulation 高電氣絕緣

產品應用端 Applications

Electronic components: IC, CPU, MOS
LED, M/B, P/S, Heat Sink,
LCD-TV, Notebook PC, PC, Telecom Device, Wireless Hub.....etc
DDR II Module, DVD Applications, Hand-set applications.....etc

熱阻抗VS.壓力VS.變形量示意圖 Thermal Resistance VS. Pressure VS. Deflection

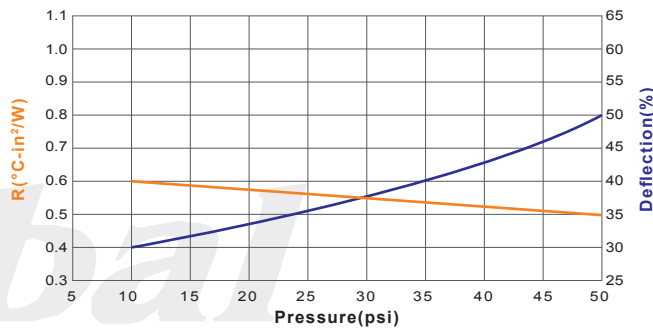


Pressure (psi)	R (°C-in²/W)	Deflection (%)
10	0.6	30
30	0.55	38
50	0.5	50


產品物性 Properties

● REACH Compliant 符合REACH規範 ● RoHS Compliant 符合RoHS規範 ● UL Compliant 符合UL規範

Thermal Conductivity 導熱係數 : 3.5 W/mK



Hardness 軟硬度 : 40 (Shore 00)




Testing sample thickness: 0.3mm

In "Thermal resistance V.S. Pressure V.S. Deflection" chart, TG4040LC provides low thermal impedance. The pressure gets higher, the thermal impedance gets lower, and deflection percentage gets higher. TG4040LC provides good compliance and softness.

Properties	TG4040LC	Unit	Tolerance	Test Method
Thermal Conductivity 導熱係數	3.5	W / mK	±0.35	ASTM D5470
Thickness 厚度	0.3~5	mm	-	ASTM D374
	0.0078~0.1968	inch	-	-
Color 顏色	Blue藍	-	-	Visual目視
Flame Rating 耐燃等級	V-0	-	-	UL 94
Dielectric Breakdown Voltage 耐電壓	4	KV	±0.4	ASTM D149
Weight Loss 重量損失	<0.4	%	-	ASTM E595
Specific Gravity 比重	2.6	g / cm³	±0.2	ASTM D792
Working Temperature 工作溫度	-45~+200	°C	-	-
Volume Resistance 體積阻抗	>10 ¹¹	Ohm-m	-	ASTM D257
Elongation 延展率	100	%	-	ASTM D412
Tensile Strength 抗拉強度	60	N / mm²	-	ASTM D412
Standard Shape 標準形狀	Sheet ones單片狀	-	-	-
Hardness 硬度	40	Shore 00	±10	ASTM D2240

Need samples? 樣品需求? Pre-cut for different shapes 可依需求沖型裁切



1. Choose the P/N
2. Fill into size: x,y,z
3. Fill the quantity you need